

HYDRA RAM[®]

DEMOLITION & RECYCLING EQUIPMENT




**14 MODELS CONCRETE CRUSHERS FROM 180 UP TO 12.000 KGS
FOR EXCAVATORS FROM 2 ~ 150 TONS**



CONCRETE CRUSHERS

HCC SERIES

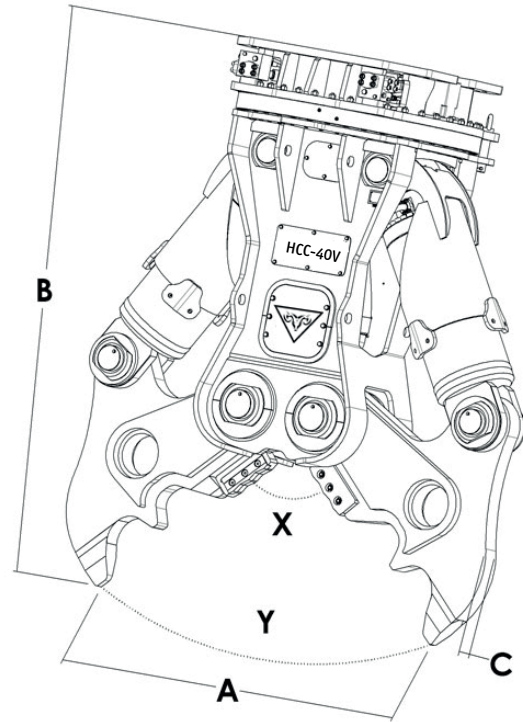

	HCC-2V	HCC-3V	HCC-5V*	HCC-10V*	HCC-13V*	HCC-17V*	HCC-22V*	HCC-27V*	HCC-40V	HCC-50V	HCC-65V	HCC-85V	HCC-100V	HCC-120V
⁽¹⁾ t.	2 : 4	4 : 7	5 : 9	10 : 15	20 : 25	16 : 21	22 : 28	29 : 35	36 : 49	50 : 65	66 : 85	85 : 105	86 : 130	86 : 150
** kg.	180	350	550	1020	1320	1680	2130	2640	3820	4850	6430	8550	10750	12200
A mm.	280	358	480	685	610	820	890	1090	1370	1500	1680	1830	2050	2305
B mm.	1020	1165	1300	1550	1750	1775	1900	2115	2520	2690	2950	3160	3350	3700
C mm.	25	35	50	60	60	70	70	80	90	100	100	120	120	130
mm.	90	140	140	140	180	180	180	220	260	325	325	325	400	400
X t.	60	80	80	160	180	170	205	220	365	470	590	720	760	820
Y t.	18	22	20	45	45	60	70	75	85	120	145	185	220	240
t.	20	30	40	80	60	100	115	125	155	215	260	335	395	395
N°	1	1	2	2	1	2	2	2	2	2	2	2	2	2
bar	210	210	250	310	310	310	310	310	310	340	340	340	340	340
l/min.	40/60	60/80	80/150	150/250	180/250	180/250	200/300	250/350	300/400	350/450	400/500	450/650	500/800	500/800
bar	120	120	120	140	140	140	140	140	140	140	140	140	140	140
l/min.	5	5	10	10	10	10	10	10	10	30	30	50	50	50
open/close sec.	1,1/1,3	1,2/1,2	0,8/1,4	0,9/1,7	0,9/1,6	1,7/3,3	1,8/3,4	2,0/2,6	3,5/3,1	3,6/3,9	3,8/4,1	3,8/3,9	3,7/4,0	3,7/4,1

(*) Equipped with exchangeable teeth

(**) The above mentioned weight is without connection plate

(1) Recommended excavator / attachment combination

